

CNC Plus Manual Lathe


Model: CKE-2660



Shown here with Anilam 4200T CNC control
and optional 6-position horizontal turret

Outstanding Features:

- 10 HP AC frequency drive spindle motor
- 4 operating modes: manual, teach-in, conversational, and cnc
- Rigid FC-30 machine base casting with extra ribbings
- Induction hardened and ground ways
- 3 speed auto-shifting gearbox with alloy steel gears that are hardened and ground
- Extra large precision ground ballscrews
- 7-2200 RPM range, electronic MGP handwheels
- Auto lube system with metered check valves
- Programmable automatic 4-position indexing tool post, 6-position turret optional
- Full enclosure (splash guards and 2 front doors)

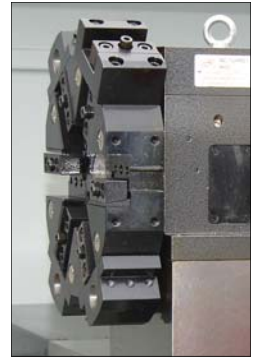

Optional 6-position turret

SPECIFICATIONS:	CKE-2660
Swing over bedways	26
Swing over cross slide	16.9
Distance between center	60
Width of bed	15.75
Spindle nose	D1-8
Spindle bore	3-1/16
Spindle taper	1:20
Spindle speeds	Low 7-135 RPM, Medium 30-550, High 110-2200 RPM
Longitudinal travel (Z-axis)	56
Cross slide travel (X-axis)	12
Ballscrew diameter	Z: 2, X: 1
Rapid traverse	Z: 300 IPM, X: 150 IPM
Tailstock quill diameter	2.95
Spindle motor	10 HP
Net Weight	6270 LBS
Shipping Dimension	132 x 69 x 67

AVAILABLE OPTIONS:

- | | |
|-----------------------|----------------------|
| 6-position Turret | Hydraulic chuck |
| Quick change toolpost | Hydraulic tailstock |
| Off-line Software | 5c collet closer |
| 15 HP spindle motor | Remote MGP Handwheel |
| Face Plate | Fanuc controls |
| Follow rest | Bar feeder |

STANDARD INCLUDES:

- Anilam 4200T cnc control
- Manual plus cnc operation
- 10" color LCD display
- Easy conversational programming
- Programmable spindle rpm
- Spindle rpm override knob
- Programmable coolant (M8)
- Programmable 4-position tool post
- Customizable M-Functions
- Auto lubrication system
- Full enclosure
- Work light

